


INOMETA INOflex[®] HACHURE 45° – VOLUME CHART (cm³/m²)

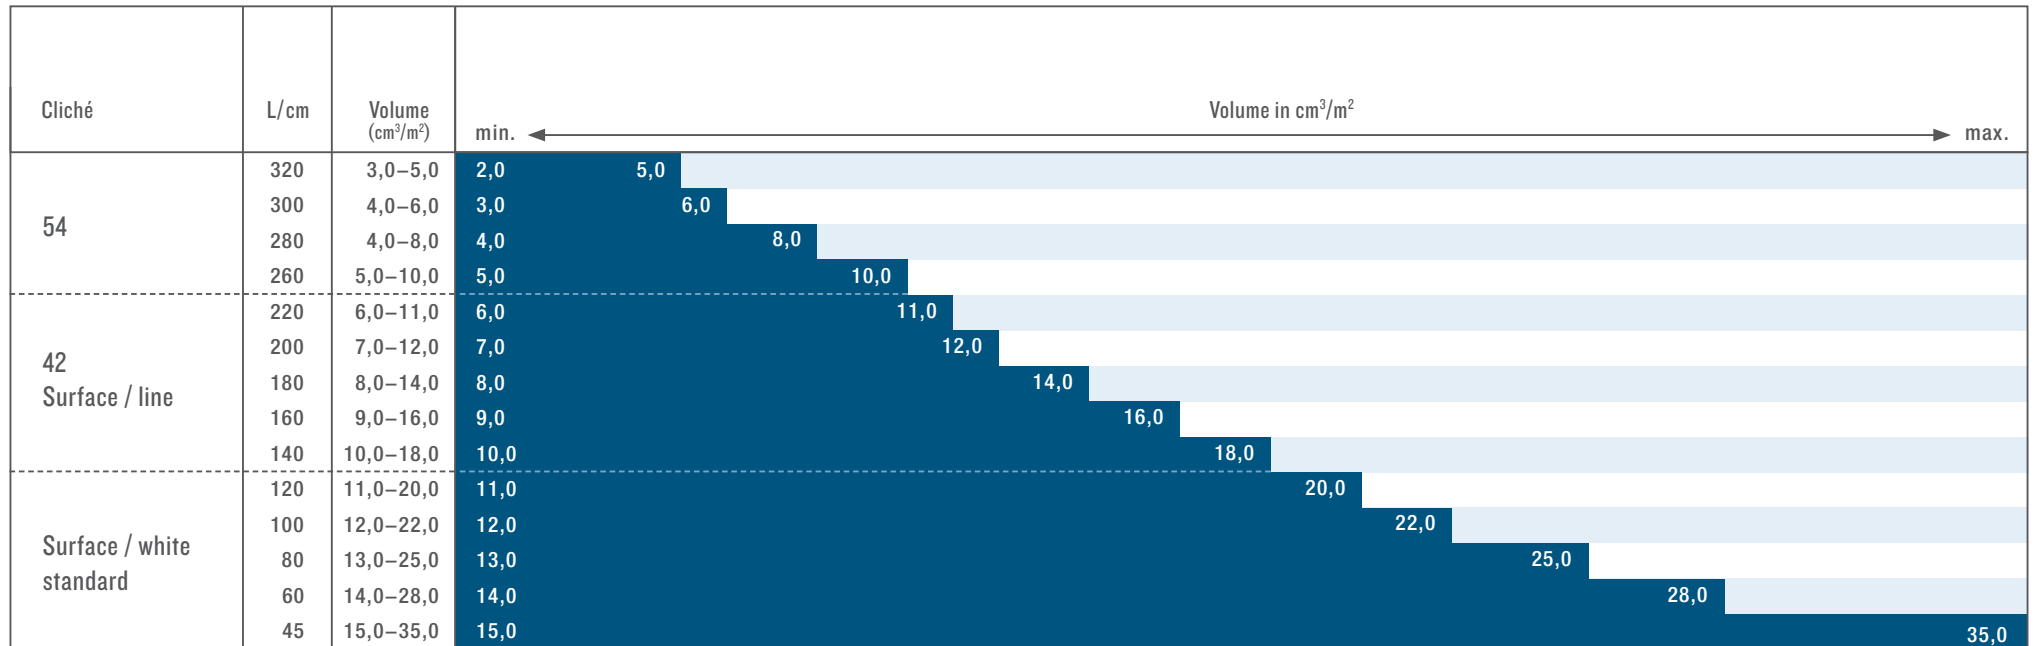

VOLUME TOLERANCES

Volume up to 3 cm³/m² / ±4%

Volume between 3–6 cm³/m² / ±5%

Volume beyond 6 cm³/m² / ±6%

POLISHBACK STANDARD

UV: 9–15%

STD: 30–50%

W&H: 60–70%

LINE COUNT TOLERANCES

±10 lines